

Speed Queen®

Manual

Commercial Washers & Dryers

Push-to-Start

SWT811 Topload Washer

SDG809/SDE807 Single Load Dryers

SSE807 Stack Dryer - Solid Door



Commercial Built to Last Longer

Standard Control

Laundry owners and managers constantly are confronted with issues such as energy conservation, low operating costs and equipment breakdowns. That's why when it comes to commercial washers and dryers, water and energy efficient designs and quality internal components are important factors to consider when equipping a laundry room.

Our manual control line features toploaders that offer six cycle selections and push-to-start activation. Our single load and stack dryers have four heat/cycle options and push-to-start activation. These units are ideal for military, colleges, restaurants, beauty salons and other special business applications.

Your authorized Speed Queen distributor can design a laundry solution to meet the needs of your property.

High Efficiency Automatic Washer

- Efficiently designed for energy and water savings for an average water consumption of only 99 litres.
- Waterfall fill enhances wash and rinse cycles for maximum removal of soil and soap residue.



- Preset cold water rinses minimize hot water consumption to an average of only 17 litres per cycle.

Superior Wash/Rinse Action

- Curved four-vane polypropylene agitator with 210° wash stroke, the longest in the industry, produces superb washing and rinsing results.



High-Speed Spin Extract

- A high extract speed of 710 RPM spins clothes out drier. In fact, the high spin speed lowers moisture retention by 3.4% over previous models. This means faster drying, increased cycle turns and satisfied users.

Automatic Balance System

- Residents will appreciate the Automatic Balance System (ABS) for smooth and quiet operation, even on wood floors. The ABS provides the industry's best out-of-balance handling, completing wash cycles without interruption.



Quality Washer Components

- Unit is 100% front serviceable.
- Durable stainless steel washtub.
- Heavy-duty, 1/2 HP, one-speed motor.
- Start capacitor lowers amperage draw.
- Single-belt drive simplicity.
- Corrosion-resistant polypropylene pump.
- Dependable, Eversmooth transmission.
- Rear self-leveling legs.



Superior Drying Convenience

- A wide door opening of 1,914 sq. cm. is the industry's largest, offering residents the convenience of easy loading and unloading.
- Door is reversible for installation flexibility. The upfront lint filter is easy to clean and secured.

Drying and Energy Dynamics

- Durable galvanized steel cylinder with extra-large 9 kg capacity. The gentle tumble action minimizes wrinkles.
- Quiet, efficient blower system with superior airflow of 105 litres per second for fast drying and lower operating costs.
- Efficient electric dryer heating with 4,000 Watts.



Stack Dryer Features

- A space saver! Two dryers in the space of one, both operating independently.
- Graphic arrows on control that indicate upper and lower pockets.
- 100% serviceable from the front.

Control Features



Manual
Washer Control



Manual
Dryer Control


Washer

User selectable options for Hot, Warm or Cold wash temperatures. One-speed model offers three wash temperatures combined with selections for six cycles including three "water saver" cycles.

Dryer

The dry cycle is efficient and fast with settings up to 60 minutes available. Customers have the flexibility to choose from four heat/cycle selections. A convenient push-to-start switch activates cycle and is indicated by an "In-Use" light.


Activation Features



Push-to-Start

Speed Queen's manual timers on both the washers and dryers are easy to activate with manual push-to-start operation. Cycle times easily can be changed by simply setting control dip switches.

Durable porcelain enamel tops and lids resist corrosion and scratching, assuring long-lasting appearance.

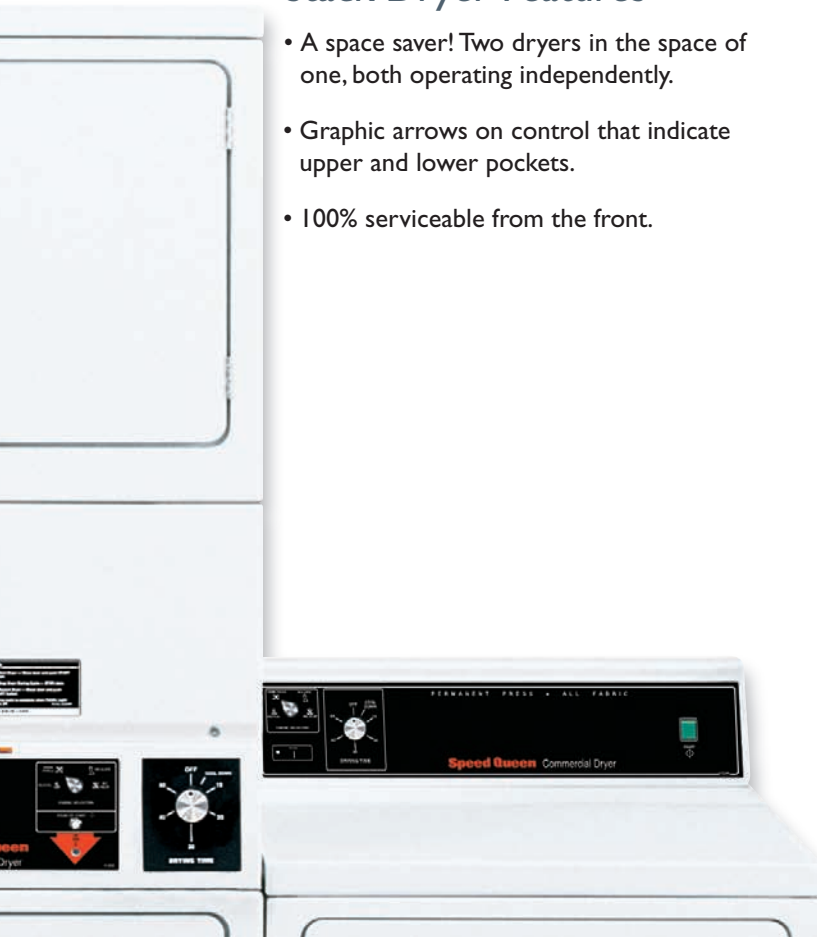

Washer & Dryer Specifications

	Washer	Dryer	Stack Dryer
	SWT811	Electric: SDE807, SDG809	Electric: SSE807
Basket/Cylinder Volume - litres (cu. ft.)	79 (2.8)	198 (7.0)	198 (7.0)
Width - mm (in)	651 (25 5/8")	683 (26 7/8")	683 (26 7/8")
Depth - mm (in)	711 (28")	711 (28")	711 (28")
Height* - mm (in)	1092 (43")	1092 (43")	1946 (76 5/8")
Work Surface Height - mm (in)	914 (36")	914 (36")	N/A
Weight - kg (lb)	86 (190)	Electric: 61 (135) Gas: 64 (140)	Electric: 120 (265)
Shipping Weight - kg (lb)	95 (210)	Electric: 66 (145) Gas: 68 (150)	Electric: 127 (280)
Cycle Time - minutes	16-31	45	45
Motor HP (Capacitor Start and Thermal Protected)	1/2 HP, 1-speed	1/3 HP, 5.5 amps	1/3 HP, 5.5 amps
Water Consumption - ltrs. per cycle	99	N/A	N/A
Hot Water - litres per cycle	17	N/A	N/A
Water Pressure - bar (psi)	Pressure fill — 1.4/8.3 (20 to 120)	N/A	N/A
Spin Speed - RPM	710	N/A	N/A
Cycle/Temperature	Hot Warm Cold	Normal Permanent Press Delicate No Heat	Normal Permanent Press Delicate No Heat
Electrical Specifications	240/50/1-10 amp	Electric: 240/50/1-20 amp Gas: 240/50/1-10 amp	Electric: 240/50/1-20 amp
Mj Per Hour	N/A	26.38	N/A
Heating Element	N/A	4000 W, 240 V	4000 W, 240 V
Type of Gas (Gas models only)	N/A	Factory-equipped natural/ mixed gas. Convertible to LP gas.**	N/A
Utility Connections - mm (in)	N/A	Gas: 9.5 NPT (3/8")	N/A
Air Outlet Diameter - mm (in)	N/A	102 (4")	102 (4")
Exhaust Airflow*** - litres/sec. (cfm)	N/A	220 (105)	220 (105)
Maximum Exhaust Static Back Pressure	N/A	0.6" W.C.	0.6" W.C.
Agency Approval	Electric: Queensland Government	Electric: Queensland Government Gas: Australian Gas Assoc.	Electric: Queensland Government
Activation	Push-to-Start	Push-to-Start	Push-to-Start
Self-Adjusting Rear Legs	Yes	No	No
Top and Lid Finish	Porcelain	Porcelain	N/A
Colors	White	White	White
Door Type	Solid	Solid	Solid

* Heights may vary slightly depending on leveling adjustments.

** IMPORTANT: Any product revisions or conversions must be made by the Manufacturer's Authorized Dealers, Distributors, or local service personnel.

*** Measured at point of exit from dryer.

Features and certifications may vary by model.

At Speed Queen, we're so confident that our heavy-duty commercial washers and dryers are Commercial Built to Last Longer, that we're offering the following limited warranty to prove it: Through three years† — Any part of the washer, dryer or stack dryer. Through five years† — The washer transmission assembly, base and cabinet assembly including top, lid and door, against rust from inside out. Lifetime† — The stainless steel washtub.

† Parts only. Labor not included. See Speed Queen Warranty Bond for specifics.

For the most accurate information the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management systems at all Alliance Laundry Systems manufacturing facilities are registered as ISO 9001:2000 compliant.

©Copyright 2007 Alliance Laundry Systems LLC